


EGX-MXM-P1000

Mobile PCI Express Module with NVIDIA® Quadro® Embedded P1000

特点

- MXM 3.1 Type A form factor (82 x 70 mm)
- 512 NVIDIA® CUDA® cores
- 1.8 TFLOPS SP peak performance
- 4GB GDDR5 memory
- 96GB/s maximum memory bandwidth
- Support up to 4 FHD displays, 50W TDP
- 5-year availability

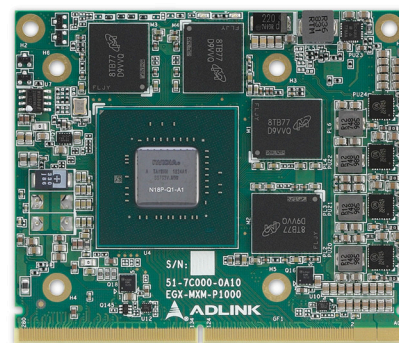

简介

The EGX-MXM-P1000 features advanced NVIDIA Quadro GPU with NVIDIA Pascal™ Architecture technology in MXM 3.1 Type A form factor. The EGX-MXM-P1000 has 512 NVIDIA CUDA cores and a peak single-precision floating-point performance of 1.8 TFLOPS. The EGX-MXM-P1000 has 4GB of GDDR5 memory and supports NVIDIA GPUDirect™ RDMA which helps increase data throughput by up to 80% and consequently system responsiveness by up to 60%*. Additionally, 4 FHD display outputs and an extended operating temperature range of -40°C to 85°C are supported. The embedded graphics product is suitable for mission-critical harsh-environment edge computing applications with size, weight, and power (SWaP) and network connectivity constraints.

订购指南

EGX-MXM-P1000

NVIDIA Quadro Embedded P1000, MXM 3.1 type A, 82 x 70mm, PCIe x16 Gen3

Specifications

	EGX-MXM-P1000
Graphic Core	
Graphic Architecture	NVIDIA Pascal GP107
GPU	Quadro P1000
Display Outputs	4x DisplayPort 1.4 digital video outputs Support for High Dynamic Range (HDR) video 4K at 120Hz or 5K at 60Hz with 10-bit color depth
Signal Interface	MXM 3.1, PCI Express Gen3 x16 supports
GPGPU Computing	
CUDA Supports	512 CUDA cores, 1.8 TFLOPS SP Peak CUDA Toolkit 8.0, CUDA Compute version 6.1 OpenCL™ 1.2, DirectX® 12, OpenGL 4.5, Vulkan 1.0
Memory	GDDR5 4GB memory, memory width: 128-bit, bandwidth: 96 GB/s
Mechanicals	
Dimensions	82 (W) x 70 (D) x 4.8 (H) mm
Locking Mechanism	Standard MXM 3.1 Type A
Environmental	
Operating Temp.	Standard: 0°C to 55°C, ETT: -40°C to 85°C
Storage Temp.	-40°C to 85°C
SW	
OS Support	Windows 7/10 & Linux Drivers, 64-bit